

SUBMERSIBLE

INDUSTRIAL DRAINAGE

PVM

- 2" (50mm) outlet
- automatic
- 230 volts
- ✓ Fixed installations
- ✓ Lift shafts
- ✓ Water features
- ✓ Processing


PV pumps have rugged cast iron pump bodies and impellers, combined with a corrosion resistant 304 stainless steel motor casing for durability. A single mechanical seal, in silicon-carbide, is fitted on a 420 stainless steel shaft for added reliability. These compact pumps offer exceptional flows and heads from motors of relatively low power. The **PV200R** pump offers high head pumping of clear water, while the **PV200A** provides large capacity pumping of dirty water containing soft solids. Both are supplied with external, in-line starter and motor protection boxes and are suitable for a variety of industrial applications. Supplied with 10 metres of H07RN-F power cable.



PVM 200/A



PVM 200/R

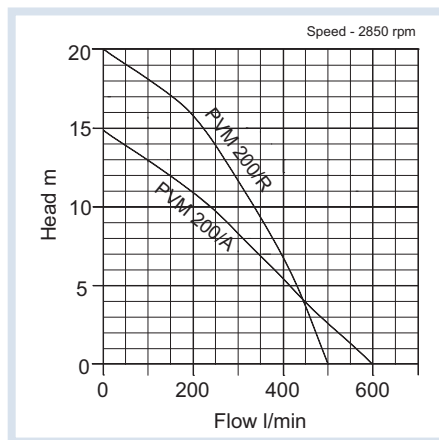

ACCESSORIES

- Hoses page 91
- Hose tails page 94
- Non return valves page 102

model	Manual or Auto	outlet (BSPF)	kW	volt	flow (l/min)	head (mtrs)	free passage (mm)	w x l x h (mm)	weight (kgs)
PVM 200/R	A	2"	1.50	230	500	20	10	170x310x458	24.3
PVM 200/A	A	2"	1.50	230	600	15	50	170x310x446	22.6

Optional extra: 2" BSPM x 50mm hose tail (polypropylene)