

# SUBMERSIBLE

## RX

INDUSTRIAL DRAINAGE

- 32mm (1¼") outlet
- manual
- automatic
- 110 volts
- 230 volts
- ✓ Cellars
- ✓ Sumps
- ✓ Processing
- ✓ Portable uses
- ✓ Installations


The **Drain** versions of the **RX**, in corrosion resistant, 304 stainless steel, are designed for clean and dirty water, for use in domestic, trade and industrial applications. They will handle suspended soft solids up to 10mm in diameter (users with applications containing larger solids should select from the **Vortex** versions on page 22). The top discharge design makes them suitable for partial immersion applications and where space or access is restricted. The 416 stainless steel shaft is fitted with a single mechanical seal (in an oil chamber), lip seal and a 304 stainless steel impeller. Maximum liquid temperature is 50°C, however intermittent use up to 90°C for 3 minutes is permissible. They will offer excellent service and consistent operation in challenging duties. They are not, however, recommended for ponds. Supplied with 10 metres of heavy duty, H07RN-F rubber power cable.



**RX manual**



**RX automatic**

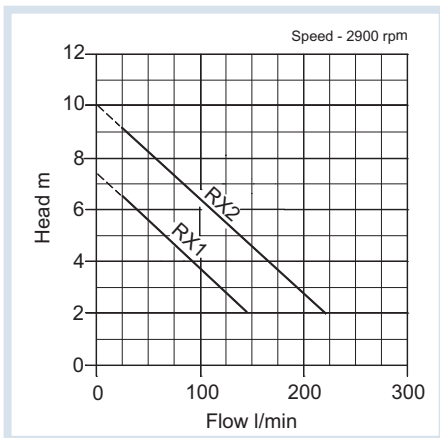

### ACCESSORIES

- Hoses page 91
- Nipples page 97
- Elbows page 99

model	Manual or Auto	outlet (mm)	kW	volt	flow (l/min)	head (mtrs)	free passage (mm)	dia x h (mm)	weight (kgs)
Drain RXm1	M	32	0.25	110•230	140	7.5	10	Ø147x255	3.9
Drain RXm1	A	32	0.25	110•230	140	7.5	10	Ø147x255	4.1
Drain RXm2	M	32	0.37	110•230	220	10	10	Ø147x255	4.9
Drain RXm2	A	32	0.37	110•230	220	10	10	Ø147x255	5.1