

SUBMERSIBLE

TOP pumps, in high quality engineering plastic and 304 stainless steel, are designed for clean and slightly dirty water. The top discharge design makes them suitable for partial immersion applications and where space or access is restricted. The 416 stainless steel shaft is fitted with a mechanical seal, intermediate oil chamber and inner lip seal, which offer wear resistance and protection in the event of dry running. Maximum liquid temperature is 40°C, however intermittent use up to 90°C for 3 minutes is permissible. They offer excellent reliability in trade and industrial applications, where high quality of construction is required. They are not, however, recommended for ponds. Supplied with 10 metres of heavy duty, H07RN-F rubber power cable.

TOP

PROFESSIONAL DRAINAGE

- ✓ Cellars
- ✓ Sumps
- ✓ Transfer
- ✓ Irrigation
- 25mm (1") – 32mm (1¼") outlet
- manual
- automatic
- 110 volts
- 230 volts




TOP 1 automatic



TOP 1 manual

ACCESSORIES

- Hoses page 91
- Reducing hose tails page 94
- Sockets page 98

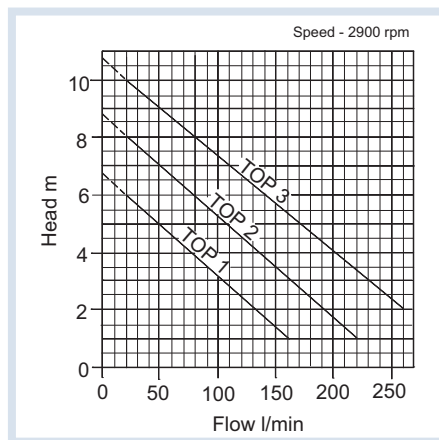

model	Manual or Auto	outlet (mm)	kW	volt	flow (l/min)	head (mtrs)	free passage (mm)	w x l x h (mm)	weight (kgs)
TOP 1	M	25	0.25	110•230	160	7	10	140x152x217	3.2
TOP 1	A	25	0.25	110•230	160	7	10	140x152x217	3.5
TOP 2	M	32	0.37	110•230	220	9	10	140x152x237	4.1
TOP 2	A	32	0.37	110•230	220	9	10	140x152x237	4.4
TOP 3	M	32	0.55	110•230	260	10.5	10	140x152x267	5.5
TOP 3	A	32	0.55	110•230	260	10.5	10	140x152x267	5.8