


# SUBMERSIBLE

The **VX** sewage pumps, in 304 stainless steel and cast iron, are designed for pumping dirty water containing suspended solids and fibrous material. They are designed for large volume drainage in domestic, trade and industrial applications. Other quality components used for enhanced reliability include a 416 stainless steel shaft and a 304 stainless steel vortex impeller. For increased wear resistance and protection in the event of dry running, a hard wearing silicon carbide mechanical seal, intermediate oil chamber and inner lip seal are fitted. Supplied with 10 metres of heavy duty, H07RN-F rubber power cable.

## VX

- ✓ Fixed Installations
  - ✓ Screened effluent
  - ✓ Processing
  - ✓ Light Sewage
  - ✓ Water Features
- 1½" (40mm) – 2" (50mm) outlet
  - 35mm – 50mm passage
  - manual
  - automatic
  - 230 volts
  - 400 volts

MEDIUM DUTY SEWAGE - VORTEX IMPELLER

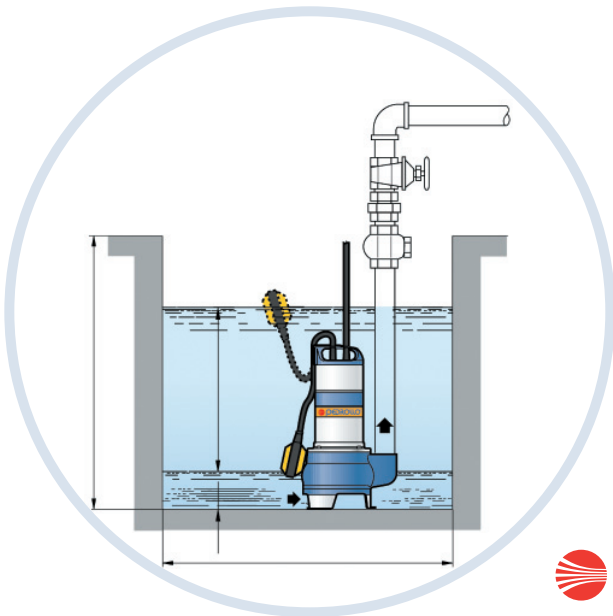


**PEDROLLO**  
... the spring of life



**VXm automatic**

### ACCESSORIES

- Reducing bushes page 99
- Gate valves page 102
- Swing valves page 102

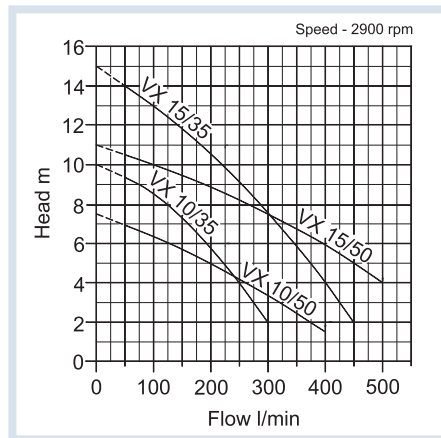

model	Manual or Auto	outlet (BSPF)	kW	volt	flow (l/min)	head (mtrs)	free passage (mm)	w x l x h (mm)	weight (kgs)
VXm10/35	A	1½"	0.75	230	300	10	35	174x224x380	12.9
VXm15/35	A	1½"	1.10	230	450	15	35	184x235x400	15.1
VXm15/35 - VX15/35	M	1½"	1.10	230•400	450	15	35	184x235x400	14.9
VXm10/50	A	2"	0.75	230	400	7.5	50	180x240x410	13.3
VXm15/50	A	2"	1.10	230	500	11	50	194x260x430	15.5
VXm15/50 - VX15/50	M	2"	1.10	230•400	500	11	50	194x260x430	15.3

"m" in model column indicates single phase

Optional extra: 1½" BSPM x 40mm hose tail (polypropylene)

Optional extra: 2" BSPM x 50mm hose tail (polypropylene)